

960H(700TVL) HIGH RES IR VANDAL DOME CAMERA

SVD-T3010HP2812




FEATURES


- **1/3" Panasonic CCD (960H)**
- High Resolution (700 TVL)
- D-WDR
- Anti Color Rolling / Breathing / De-Moire
- Motion Detection
- LSC (Lens Shading Compensation)
- Mirror (Horizontal)
- Smart IR
- AWB
- BLC / HLC
- Privacy Mask
- RS-485 (PELCO-D)
- Belmish Compensation
- True Day & Night (ICR)
- 30pcs of 850nm IR LED
- IP 67 Rated Weatherproof
- 3-Axis Mount Bracket
- Surface / Flush Compatible
- Coaxial Cable Communication (Pelco-c,CCVC)
(Option : Remote Controller)



DIMENSION

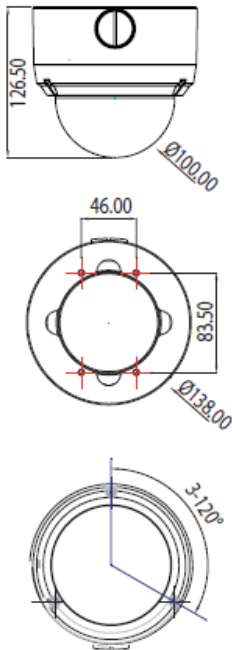

CABLE

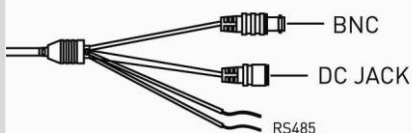

SPECIFICATION

ITEM	SVD-T3010HP2812	SVD-T3010HP2812A
Image Device	1/3" High-Resolution Panasonic CCD (960H)	
Image Processor	NVP 2080	
Effective Pixels	NTSC=976(H) x 494(V) / PAL=(V)976(H) x 582(V)	
TV System	NTSC / PAL	
Scan Freq.	NTSC=59.94Hz(V), 15.734KHz(H) PAL=50Hz(V), 15.625KHz(H)	
Synchronization	Internal	
H. Resolution	700TVL	
Sensitivity	0.003Lux (F1.2@ 50IRE)	
S/N Ratio	More than 50dB with AGC OFF at 50IRE	
Electronic shutter	NTSC=1/60 ~ 1/100,000sec PAL=1/50 ~ 1/100,000sec	
White Balance	2,000 ~ 8,000°K Automatic tracking	
OSD	D-WDR, Smart IR, LSC, BLC, HSBL, Privacy Mask, Motion Detection, Belmish Compensation, De-Moire	
Video Output	VBS 1Vpp +/-10%, 75ohm	
Lens	2.8-12mm DC Drive Lens	
Day & Night	True Day & Night (ICR)	
IR LEDs	30pcs of 850nm IR LEDs	
Protection Rating	IP 67	
Operating Power	12VDC : 400mA	12VDC:520mA 24VAC : 380mA Dual Power
Operating Condition	-20°C~+60°C / 10%~85%RH	
Dimension	100(Ø) x 137.7(W) x 126.5(H) mm	

Design and specifications are subject to change without notice.